




FlexLite Linear Striplight



Flexible LED Linear Striplight system, with completely homogeneous and diffuse luminous output, suitable for indoor or outdoor applications.

Construction: UV resistant extruded thermoplastic resin IP68 housing with IP68 connectors. IK06 (IK10 Pending).

Installation: Ribbon system design allows for quick installation in multiple lengths. (Exact lengths to be advised at order stage). Ribbon is glued to surface or via optional extruded mounting rail.

Note:

Bending radius - Vertical - 1000mm,
Bending radius - Horizontal - 200mm.

LED: 10w to 20w per metre. Remote 24VDC Driver required. 4K as standard. Operating temperature -20 °C to + 60 °C.


Options: 3K, 5K or RGB version on request.

Lifetime: 50,000hr L70

Manufactured: EU.

Product Compliance: EN 60598, CE.

DIMENSIONS

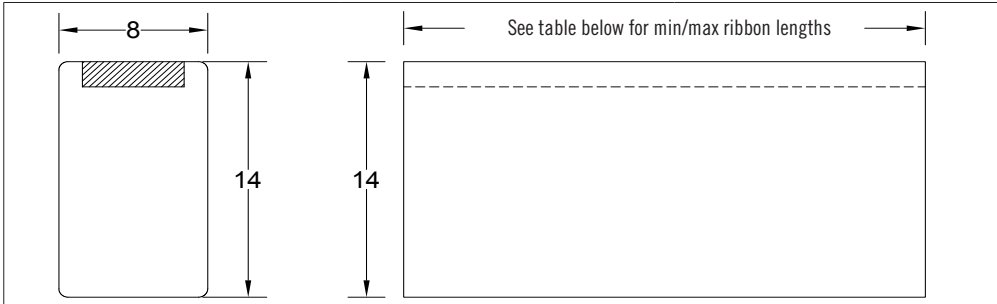

Wattage - per meter	Minimum length per connection (mm)	Maximum length per single per connection(m)
10w	50mm	13m
20w	50mm	10m

IP68 Connector (Vertical)



IP68 Connector (Horizontal)

ORDERING CODE - FlexLite Systems

Wattage - p/m	Lamp Type	Code	Details	Lumen Output	Roll Length
10w	LED	5LCF00110	FlexLite 10w p/m, 4K - remote driver required	170 lm/m	13m*
20w	LED	5LCF00122	FlexLite 20w p/m, 4K - remote driver required	320 lm/m	10m*
-	-	5LCF00510	IP68 Connector and End Cap		
-	-	5LCF00500	Optional Aluminium Installation Frame for Recessing per meter		2m

* Please Specify the Lengths required - We will add connectors as necessary. Connectors come with up to 5m of waterproof cable.

ORDERING CODE - Remote LED Drivers

25w	-	1BTLV025	24V Remote Driver	-	-
120w	-	1BTLV120	24V Remote Driver	-	-
200w	-	1BTLV200	24V Remote Driver	-	-

OPTIONS

3K: 3000K
5K: 5000K
RGB: RGB Version
DW: Dual White

