





Karrera Series

Recessed Groundlight



Recessed ground light luminaire suitable for pathways, driveways and facade lighting.

Construction: Die-cast Aluminium with brushed stainless Steel trim. IP68. IK10.

Lens: Tempered glass lens 12mm (available in clear or frosted lens).

Installation: Recessed ground mounted with stainless steel trim. 300mm drainage area required.

LED: Available in 6w-39w LED. 4K as standard, 3K on request.



Options: DALI, RAL colours on request, clear or frosted lens.

Driver: Internal LED Driver.


Manufactured: EU.

Product Compliance: EN 60598, CE.

Warning: Groundlights can be a glare, slip or burn hazard. Vandalism or accidental breakage can result in electrical, glass or trip hazard. Locate to avoid or minimise these hazards.



DIMENSIONS

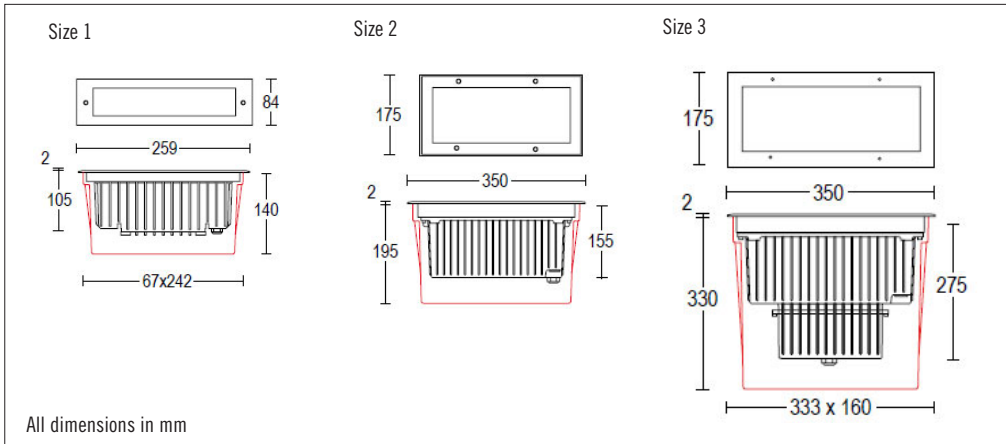

ORDERING CODE

Wattage	Type	Size	Code	Details	+ Installation Frame	Lumens
6w	LED	1	G6521.AHFA400	Karrera, 38x86° Beam, Frosted Lens, 4K	GAC022	864 lm
10w	LED	1	G6521.CAST400	Karrera, 12° Beam, Clear Lens, 4K	GAC022	1090 lm
10w	LED	1	G6521.CAMT400	Karrera, 25° Beam, Clear Lens, 4K	GAC022	1090 lm
18w	LED	2	G5613.BUAT400	Karrera, Asym Beam off centre #, Clear Lens, 4K	GAC024	2205 lm
26w	LED	2	G5613.CGAT400	Karrera, Asym Beam off centre #, Clear Lens, 4K	GAC024	3012 lm
39w	LED	3	G5615.CDAT400	Karrera, Asym Beam off centre #, Clear Lens, 4K	GAC148	4336 lm

*Source lumens #Asymmetric 112 x 95 x 30 Degree Beam

OPTIONS

3K - 3000K Warm White
DALI: DALI on request